

Shark Navigator[®] Pet Plus Upright Vacuum

qualified electrician to install the proper outlet. Do not change the plug in any way.

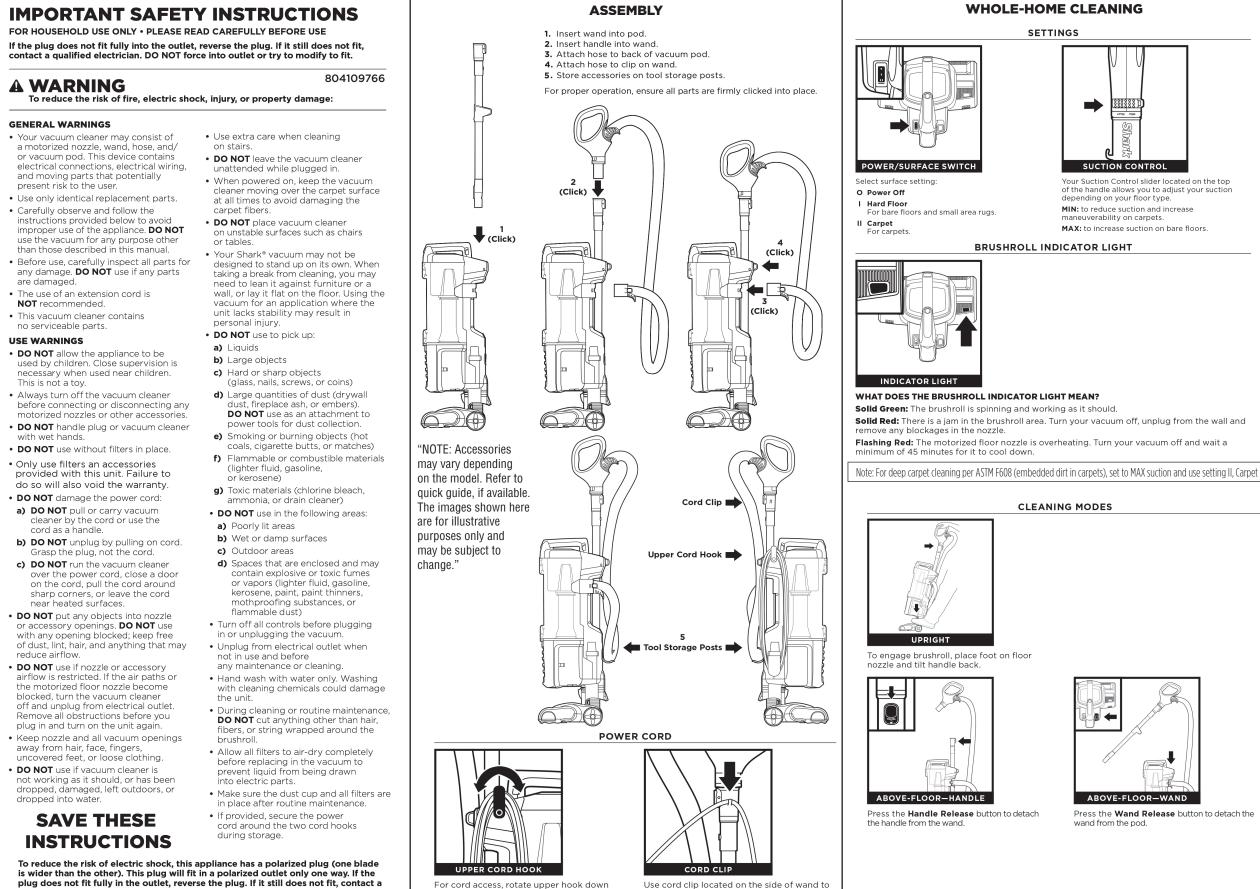

and remove cord.

hold cord in place while vacuuming




Your Suction Control slider located on the top of the handle allows you to adjust your suction depending on your floor type. MIN: to reduce suction and increase

MAX: to increase suction on bare floors.

Owner's Manual


EMPTYING THE DUST CUP




To remove **Dust Cup**, press button on top of dust cup handle. Tilt dust cup forward, then lift to remove.



Press lower release button to open bottom of dust cup.



To remove collected debris from Lint Screen press top release button and lift handle to open. Gently brush lint screen to clean.



To reinstall, place bottom of dust cup into pod and then tilt back until it clicks into place



Press the Wand Release button to detach the


CLEANING AND REPLACING THE FILTERS

CLEANING FILTERS

Regularly clean and replace your filters to keep your vacuum's suction power optimal.

To clean filters, rinse with cold water only to prevent damage from cleaning chemicals. Allow all filters to air-dry for at least 24 hours before reinstalling them to prevent liquid from being drawn into electric parts.

IMPORTANT: DO NOT use soap when cleaning the filters.




CLEAN PRE-MOTOR FILTERS **EVERY 3 MONTHS** Remove Dust Cup, then lift out Filters.

DEBRIS WRAPPED AROUND BRUSHROLL

Clean off any debris on the bristles.


only and may be subject to change.

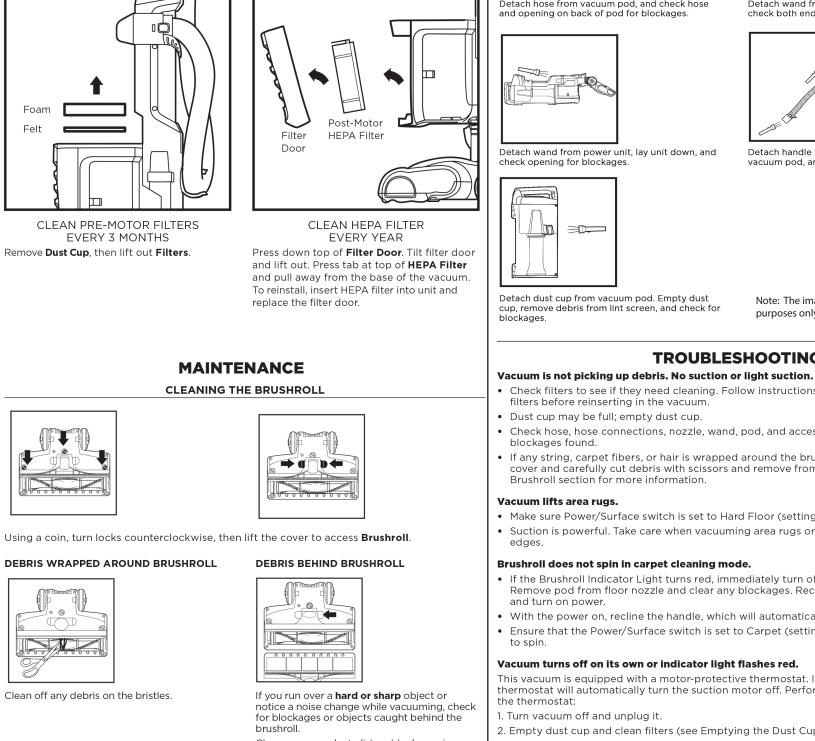

Clear away any dust, dirt, or blockages in **Debris Intake**

To close the cover, push down until it clicks into Note: The images shown here are for illustrative purposes place, then close the locks with a coin.

CHECKING FOR BLOCKAGES



Detach hose from vacuum pod, and check hose



Detach wand from floor nozzle and handle, and check both ends for blockages



Detach handle from wand and hose from the vacuum pod, and check openings for blockages

Note: The images shown here are for illustrative purposes only and may be subject to change.

TROUBLESHOOTING

- Check filters to see if they need cleaning. Follow instructions for rinsing and air-drying the
- Check hose, hose connections, nozzle, wand, pod, and accessories for blockages. Clear any
- If any string, carpet fibers, or hair is wrapped around the brushroll, remove the floor nozzle cover and carefully cut debris with scissors and remove from brushroll. See Cleaning the
- Make sure Power/Surface switch is set to Hard Floor (setting I).
- Suction is powerful. Take care when vacuuming area rugs or rugs with delicately sewn

Brushroll does not spin in carpet cleaning mode.

- If the Brushroll Indicator Light turns red, immediately turn off and unplug the vacuum. Remove pod from floor nozzle and clear any blockages. Reconnect nozzle, plug in vacuum,
- With the power on, recline the handle, which will automatically turn on the brushroll.
- Ensure that the Power/Surface switch is set to Carpet (setting II) for brushroll

Vacuum turns off on its own or indicator light flashes red.

This vacuum is equipped with a motor-protective thermostat. If your vacuum overheats, the thermostat will automatically turn the suction motor off. Perform the following steps to restart

- 2. Empty dust cup and clean filters (see Emptying the Dust Cup and Cleaning the Filters).
- 3. Check for blockages in hose, accessories, and inlet openings.
- 4. Allow unit to cool for a minimum of 45 minutes.
- 5. Plug in vacuum and restart with the Power/Surface switch.

of a product which we have refurbished.

This product that has been refurbished is warranted against any electronic or mechanical defects for a period of NINETY DAYS from the date of the original purchase by the consumer. Since this unit was sold as a refurbished item, the warranty does not apply to any cosmetic appearance items such as scratches. Should a defect occur. the Refurbished Product Service Center will repair or, at its option, replace defective unit/parts with new or rebuilt materials without charge for either parts or labor. Replacement unit/parts will be warranted for the remaining portion of the original warranty period.

This warranty does not cover installation or damage from accident, misuse, abuse, improper wiring, incorrect voltage, operating the unit against the instructions in the owner's manual or any product which has been opened, altered, or tampered with.

This warranty does not cover costs for removal and or installation of the unit for repair. Under no circumstances shall the service center be liable for any special, incidental or consequential damages or for any other expenses incurred by reason of use or sale of this product. This warranty is in lieu of any other warranties expressed or implied warranty of merchantability of fitness for particular use or otherwise.

This warranty gives the consumer specific legal rights and they may also have other rights which vary from State to State. Some States do not follow the exclusion or limitation of incidental or consequential damages, hence the above exclusion and limitations may not apply.

If you need service on your unit and this product requires repair during the 90 days warranty period; please go to www.ConsumerServiceRefurbish.com or call the Refurbished Product Service Center at 562-946-3531 to obtain the required return authorization (RA) number. Pack the unit properly (the original carton is ideal for this purpose) along with a copy of your purchase receipt and a letter describing the problem. Send the unit freight prepaid and insured to:

Refurbished Product Service Center, Att: Customer Service Department 13225 Marguardt Avenue Santa Fe Springs, CA 90670

Your unit will be promptly repaired and returned to you. We will refuse to accept delivery of the returned unit unless the assigned RA number appears on the outside of the shipping carton.

NAME:	
ADDRESS:	
CITY:	
STATE:Z	IP
PHONE:	
E-MAIL:	
MODEL:	
SERIAL NO.:	
SERIAL NO.:	

TECHNICAL SPECIFICATIONS

Voltage: 120V, 60Hz Amps: 9.5A

for blockages or objects caught behind the

REFURBISHED PRODUCT LIMITED NINETY DAYS WARRANTY

The Refurbished Product Service Center offers the following WARRANTY to the ORIGINAL purchaser

Refurbished Product Service Center 13225 Marguardt Avenue Santa Fe Springs, CA 90670.

WARRANTY REPAIR INFORMATION

Owner's Information (Keep for your permanent records)

CODE:

Printed in Mexico Sc: 02.25.2020 Pgs.:TAB Obpn:NV250Series_IB_MP_Mv3_181207 Shnmdl: NV251 BP elbrd:i.a.



Please be sure to read the enclosed Shark® Owner's Guide prior to using your unit.



4


QUICK START GUIDE

WHAT'S INSIDE

D Crevice Tool


€ Pet Multi-Tool

Vacuum Pod
Handle & Hose
Wand

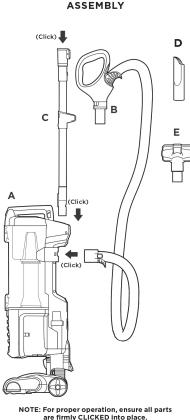

<image>

Wash filters every 3 months to keep the suction strong. Rinse filters with water only and allow to air-dry completely. Tap loose dirt from foam filters as needed between washes.



are firmly CLICKED into place.

Accessory type and quantity may vary depending on the model.

SUCTION CONTROL Adjust your suction depending on your floor type. MIN: to reduce suction and increase maneuverability on carpets. MAX: to increase suction on bare floors.




hard floor surfaces.

ABOVE-FLOOR CLEANING


FLOOR CLEANING



To engage brushroll, step on floor nozzle and tilt handle back.



2



To clean above-floor areas, remove the handle from the wand. Or for the more reach, remove the wand from the pod.

Attach desired cleaning accessory to handle or wand.

Accessory type and quantity may vary depending on the model. The images shown here are for illustrative purposes only and may be subject to change.

Printed in Mexico Sc: 02.25.2020/Pgs:0.5/Obpn:NV251_QSG_ MP_181213/Shnmdl: NV251_BP - elbrd:i.a.



2 WAYS TO CLEAN