

## Read This Manual

Inside you'll find many helpful hints on how to use and maintain your air conditioner properly. Just a little preventive care on your part can save you a great deal of time and money over the life of your air conditioner. You'll find many answers to common problems in the troubleshooting tips you should be able to fix most of them quickly before calling service. These instructions may not cover every possible condition of use, so common sense and attention to safety is required when installing, operating and maintaining this product.

### CAUTION

- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Contact the authorized service technician for repair or maintenance of this unit.
- Contact the installer for installation of this unit.
- The air conditioner is not intended for use by young children or people who cannot operate the air conditioning independently without supervision.
- Young children should be supervised to ensure that they do not play with the air conditioner.
- If the power cord needs to be replaced, contact service center and look for an authorized technician.
- Electrical installation must be performed in accordance to national regulation standards by qualified personnel only.
- The appliance shall be installed in accordance with national wiring regulations.
- Do not operate your air conditioner in a wet room such as a bathroom or laundry room.
- Appliances with electric heaters should be positioned at least 3 feet (1 m) away from combustible materials.

## SAFETY PRECAUTIONS

To prevent injury to the user or other people and property damage, the instructions shown here must be followed. Incorrect operation due to ignoring of instructions may cause harm or damage. The level of risk is shown by the following indications.

**!** This symbol indicates the possibility of death or serious injury.

**!** This symbol indicates the possibility of injury or damage to property.

### WARNING

- Plug in power cord plug properly. Otherwise, it may cause electric shock or fire due to excess heat generation.
- Do not modify power cord length or share the outlet with other appliances as it may cause electric shock or fire due to overheating.
- Always ensure effective grounding. Incorrect grounding may cause electric shock.
- Unplug the unit you notice unusual sounds or smells, or smoke comes from it. A damaged product may cause fire and electric shock.
- Keep firearms away from the unit.
- Ventilate room before operating the air conditioner if there is a gas leakage from another appliance.
- Do not operate or stop the unit by inserting or pulling out the power cord plug.
- Do not operate with wet hands or in very humid environments. It may cause electric shock.
- Do not allow water to come into contact with any electric parts. It may cause failure or electric shock.
- Do not use the socket if it is loose or damaged. It may cause fire and electric shock.
- Do not use or keep the power cord close to heating appliances. It may cause fire and electric shock.
- Do not disassemble or modify unit. It may cause failure and electric shock.
- Do not damage or use an alternate power cord. It may cause fire and electric shock.
- If the power cord is damaged, it must be replaced by the manufacturer or an authorized service center or a similarly qualified person in order to avoid a hazard.
- Do not direct airflow straight into persons to avoid possible health hazard.
- Always install a circuit breaker and a dedicated power circuit. Incorrect installation may cause fire and electric shock.

### WARNING

- Do not open the unit during operation. It may cause electric shock.
- Do not use the power cord near flammable gas or combustibles, such as gasoline, benzene, thinner, etc. It may cause an explosion or fire.
- When the air filter is to be removed, do not touch the metal parts of the unit. It may cause injury.
- When the unit needs cleaning, switch off, and turn off the circuit breaker. Do not clean unit when power is on as it may cause fire, electric shock or injury.

### CAUTION

- Stop operation and close the window during a storm or hurricane. Operation with windows open may cause water leakage into the room.
- Do not place obstacles around air inlets or inside of air outlet. It may cause failure or accident.
- Do not use strong detergents that contain wax or thinners as it may damage the product. Clean with a soft cloth only.
- Use caution when unpacking and installing. Sharp edges could cause injury.
- Do not clean the air conditioner with water. Water may enter the unit and degrade the insulation which could lead to electric shock.
- Do not put a pet or house plant where it will be exposed to direct air flow. This could injure the pet or harm the plant.
- Hold the plug by the head of the power plug when taking it out. Otherwise, it may cause electric shock and damage.
- Ensure that the installation is properly secured to prevent the product from potentially falling.
- Do not place heavy objects on the power cord and ensure that the cord is not compressed. Otherwise, there is danger of fire or electric shock.
- If water enters the unit, turn off the unit and switch off the circuit breaker. Isolate supply by taking the power-plug out and contact a qualified service technician.
- When used near a stove or other gas burning device, be sure the room is properly ventilated. Otherwise an oxygen shortage may occur.
- Do not use for any purpose other than room comfort.
- Do not use this air conditioner to preserve precision devices, food, pets, plants, and art objects. It may cause deterioration.
- Disconnect the product from power if the unit is not to be used for an extended time.
- Always insert the filters securely. Clean filter once every two weeks. Operation without filters may cause failure.
- Do not drink water drained from the air conditioner.


### NOTE

The power supply cord with this air conditioner contains a current detection device designed to reduce the risk of fire. Please refer to the section Operation of Current Device for details.

In the event that the power supply cord is damaged, it can not be repaired. It must be replaced with a cord from the manufacturer.

### WARNING - For your safety

- Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.
- Avoid fire hazard or electric shock. Do not use an extension cord or an adaptor plug. Do not remove any prong from the power cord.



### WARNING - Electrical Information

The complete electrical rating of your new room air conditioner is stated on the serial plate. Refer to the rating when checking the electrical requirements.

### Operation of Current Device

The power supply cord contains a current device that senses damage to the power cord. Test your power supply cord as follows:

- Plug in the air conditioner.

- The power supply cord will have TWO buttons on the plug head. Press the TEST button. You will notice a click as the RESET button pops out.
- Press the RESET button. Again you will notice a click as the button engages.
- The power supply cord is now supplying electricity to the unit. (On some products this is also indicated by a light on the plug head.)


### NOTES

- Do not use this device to turn the unit on or off.
- Always make sure the RESET button is pushed in for correct operation.
- The power supply must be replaced if it fails to reset when either the TEST button is pushed, or it can not be reset. Contact service center.
- If power supply cord is damaged, it can not be repaired. It MUST be replaced with a new cord. Contact service center.


## OPERATING INSTRUCTIONS

### Normal Sounds

#### RAC-WK05 Models

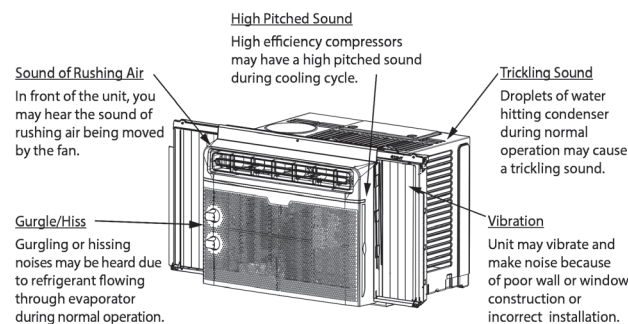

#### RAC-WK06 / RAC-WK08 / RAC-WK10 / RAC-WK12 / Models

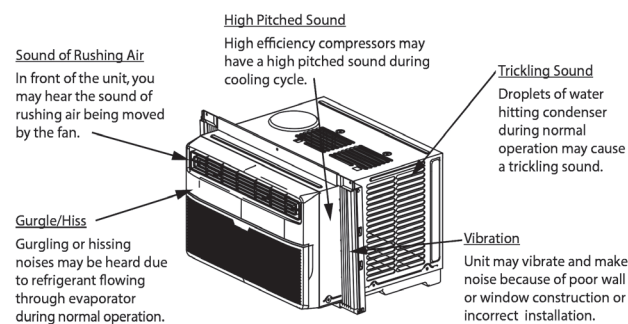

### NOTE

All the pictures in this manual are for illustrative purposes only. The actual shape of the air conditioner you purchased may be slightly different, but its operation and functions will be similar.

### Air Conditioner Features (general)



#### WARNING

To reduce the risk of fire, electrical shock, or injury to people or property, read the SAFETY PRECAUTIONS before operating this appliance.

This air conditioner is designed to be operated under the following conditions:

Cooling Operation	Outdoor temp.:	64 ~ 109°F / 18 ~ 43°C
	Indoor temp.:	62 ~ 90°F / 17 ~ 32°C

### NOTES

- The relative humidity of room should be less than 80%. If the unit is used in a condition with a relative humidity over 80%, there will be condensed water on the surface of the unit.
- Performance may be reduced outside of these operating temperatures.

### Air Conditioner Features (RAC-WK05 only)


### NOTE

Always wait 3 minutes when turning unit and then on again, or when changing from cool to fan and back to cool. This prevents compressor from overheating and possible tripping.


To begin operating the air conditioner, follow these steps:

- Set the thermostat to the highest number (coldest or cooler setting).
- Set the selector control to the highest COOL setting.
- Adjust the louver for comfortable air flow (see Air Directional Louvers).
- Once the room feels cooled, adjust the thermostat to the setting you find most comfortable.
- Make sure that the air flow inside and outside are not obstructed by anything.

### Air Directional Louvers



The louvers will allow you to direct the air flow Left or Right, or Up and Down throughout the room as needed. Move the Levers from side to side until the desired LEFT/RIGHT direction is obtained. You can also move the LEFT lever to adjust air flow UP/DOWN as needed.



### NOTE

The controls featured in this manual are representative of many available models. Your model may offer slightly different features.

#### COOL MODE

The desired cool setting is selected by rotating the knob to the right to the desired position.

**HIGH COOL** has maximum cooling effect and airflow.

**LOW COOL** has minimum cooling effect and airflow.

#### FAN MODE

Rotate the knob to the left to select your choice of fan speeds for air circulation.

*NOTE: When selecting a fan speed, the compressor will not run.*

#### THERMOSTAT

The thermostat is used to set the desired room temperature when the unit is being operated in the **COOL MODE**.

To set the desired room temperature, rotate the thermostat switch to the desired setting. After the set temperature is achieved the thermostat will automatically start and stop the compressor in order to maintain the desired set temperature.


Rotate the thermostat selector clockwise for higher cool settings. Higher cool settings will provide lower room temperature. Rotate the thermostat selector counter clockwise for lower cool settings. Lower cool settings will provide higher room temperature.

### Air Conditioner Features (Models RAC-WK06 / 08 / 10 / 12)

### Electronic Control Operating Instructions

Before you begin, thoroughly familiarize yourself with the control panel as shown below and all its functions, then follow the symbol for the functions you desire. The unit can be controlled by the unit control alone or with the remote.

### Key Pad Features

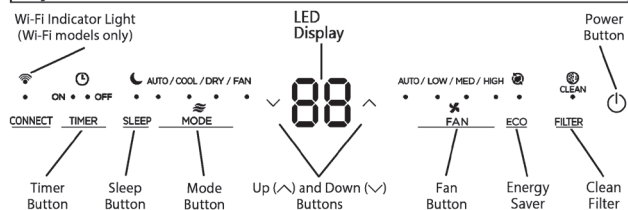

**NOTE:** The images shown here are for illustrative purposes only and may be subject to change, the actual descriptions of control panel and their locations may vary depending on the model.

### TO TURN UNIT ON OR OFF:

Press ON/OFF button to turn unit on or off.

**NOTE:** The unit will automatically initiate the Energy Saver function under Cool, Dry, Auto (only Auto-Cooling and Auto-Fan) modes.

### TO CHANGE TEMPERATURE SETTING:

Press UP/DOWN button to change temperature setting.

**NOTE:** Press or hold either UP (▲) or DOWN (▼) button until the desired temperature is seen on the display.

This temperature will be automatically maintained anywhere between 62°F (17°C) and 86°F (30°C). If you want to display the actual room temperature, see To Operate on Fan Only section.

### TO ADJUST FAN SPEEDS:

Press to select the Fan Speed in four steps - Auto, Low, Med or High. Each time the button is pressed, the fan speed mode is changed. On Dry mode, the fan operates on Low speed automatically.

### SLEEP FEATURE:

Press Sleep button to initiate the sleep mode.

In this mode the selected temperature will increase by 2°F/ 1(or 2)°C 30 minutes after the mode is selected.

The temperature will then increase by another 2°F/ 1(or 2)°C after an additional 30 minutes. This new temperature will be maintained for 6 hours before it returns to the originally selected temperature. This ends the Sleep mode and the unit will continue to operate as originally programmed. The Sleep mode program can be cancelled at any time during operation by pressing the Sleep button again.

### CHECK FILTER FEATURE:

Press Check filter button to initiate this feature.

This feature is a reminder to clean the Air Filter for more efficient operation. The LED (light) will illuminate after 250 hours of operation. To reset after cleaning the filter, press the Check Filter button and the light will go off.

### ENERGY SAVER FEATURE:

Press Energy Saver button to initiate this function. This function is available on COOL, DRY, AUTO (only AUTO-COOLING and AUTO-FAN) modes. The fan will continue to run for 3 minutes after the compressor shuts off. The fan then cycles on for 2 minutes at 10 minute intervals until the room temperature is above the set temperature, at which time the compressor turns back on and Cooling resumes.

### TO SELECT THE OPERATING MODE:

To choose operating mode, press Mode button.

Each time you press the button, a mode is selected in a sequence that goes from Auto, Cool, Dry and Fan. The indicator light adjacent will be illuminate and remain on once the mode is selected.

The unit will automatically initiate the Energy Saver function under Cool, Dry, Auto (only Auto-Cooling and Auto-Fan) modes.

### To operate on Auto feature:

- When you set the air conditioner to AUTO mode, it will automatically select cooling or fan only operation depending on what temperature you have selected and the current room temperature.
- The air conditioner will control room temperature automatically according to temperature you've set.
- In this mode, the fan speed cannot be adjusted as it's automatically controlled according to temperature setting and room temperature.

### To operate on Fan Only:

- Use this function only when cooling is not desired, such as for room air circulation or to exhaust stale air (on some models). (Remember to open the vent during this function, but keep it closed during cooling for maximum cooling efficiency.) You can choose any fan speed you prefer.
- During this function, the display will show the actual room temperature, not the set temperature as in the cooling mode.
- In Fan Only mode, the temperature is not adjusted.

### To operate on Dry mode:

- In this mode, the air conditioner will generally function as a dehumidifier. Since the conditioned space is a closed or sealed area, some degree of cooling will occur.

### TIMER: AUTO START/STOP FEATURE:

- When the unit is on or off, first press the Timer button. The TIMER ON indicator light illuminate indicating the Auto Start program has initiated.
- When the time of TIMER ON is displayed, press the Timer button again. The TIMER OFF indicator light illuminates. It indicates the Auto Stop program has initiated.
- Press or hold the UP or DOWN button to change the Auto time by 0.5 hour increments, up to 10 hours, then at 1 hour increments up to 24 hours. The control will count down the time remaining until start.
- The selected time will register in 5 seconds, and the system will automatically revert back to display the previous temperature setting or room temperature when the unit is on. (when the unit is off, there is no display)
- Turning the unit ON or OFF at any time or adjusting the timer setting to 0.0 will cancel the Auto Start/Stop timed program.

### Displays

#### DISPLAYS:

Shows the set temperature in °C or °F and the Auto-timer settings. While on Fan Only mode, it shows the room temperature.

#### DISPLAYS



#### Error codes:

**AS** - Room temperature sensor error - Unplug the unit and plug it back in. If error repeats, contact a service center.

**NOTE:** In Fan Only mode, it will display "LO" or "HI."

- Evaporator temperature sensor error - Unplug the unit and plug it back in. If error repeats, contact a service center.

**NOTE:** "\*" is shown in the display area.

### NOTE

If the unit shuts off unexpectedly due to the power outage, it will restart with the previous function setting automatically when the power resumes.

## INSTALLATION INSTRUCTIONS

### WARNING - Before You Begin

Read these instructions completely and carefully.

- IMPORTANT** - Save these instructions for local inspector's use.
- IMPORTANT** - Observe all governing codes and ordinances.
- Note to Installer - Be sure to leave these instructions with the consumer.
- Note to Consumer - Keep these instructions for future reference.
- Skill level - Installation of this appliance requires basic mechanical skills.
- Completion time - Approximately 1 hour. We recommend that two people install this product.

Proper installation is the responsibility of the installer.

Product failure due to improper installation is not covered under the Warranty.

You MUST use all supplied parts and use proper installation procedures as described in these instructions when installing this air conditioner.

Do not, under any circumstances, cut or remove the third (ground) prong from the power cord. Do not change the plug on the power cord of the air conditioner.

Aluminum house wiring may present special problems - consult a qualified electrician.


When handling unit, be careful to avoid cuts from sharp metal edges and aluminum fins on front and rear coils.

### NOTE

Save Carton and these Installation Instructions for future reference. The carton is the best way to store unit during winter, or when not in use.

### 1. Prepare the Window

Lower sash must open sufficiently to allow a clear vertical opening (see dimension H in Table 1). Side louvers and the rear of the AC must have clear air space to allow enough airflow through the condenser for heat removal. The rear of the unit must be outdoors, not inside a building or garage.



### 2. Prepare Air Conditioner


A: Remove the air conditioner from the carton and place on a flat surface.



Accessory type and quantity may vary depending on the model.


### Window Requirements

Your air conditioner is designed to install in standard double hung windows with opening widths of 23" to 36" (584mm to 914mm).



Model	5000 BTU/h	6000-8000 BTU/h	10000-12000 BTU/h
H	13" (330mm)	14" (356mm)	15-1/2" (394mm)


### Tools You Will Need (not included)




### Tools You May Use (not included)





## RAC-WK05 Models



## RAC-WK06/08/10/12/Models



B. Align the hole in the top rail with those in the top of the unit as shown in Fig. B.



C. Secure the top rail to the unit with the 3/8" Screws as shown in Fig. C.

### NOTE

For safety reasons, all four (4) screws MUST be securely fastened.

### NOTE

The top rail hardware and the Fig. B and Fig. C are not applicable to the units with more than 10000 Btu/h. Before installing unit, the top rail must be assembled on the unit (For < 10000 Btu/h models only).

## 3. Install the Accordion Panels on Air Conditioner


### NOTE

Top rail and Sliding Panels at each side are offset to provide the proper pitch to the rear of (5/16"). This is necessary for proper condensed water management and drainage. If you are not using the Side Panels for any reason, this pitch to the rear must be maintained.




- Place unit on floor, a bench or a table. Hold the Accordion Panel in one hand and gently pull back the center to free the open end. See Fig. 1.
- Slide the free end "I" section of the panel directly into the cabinet as shown in Fig. 2. Slide the panel down. Be sure to leave enough space to slip the top and bottom of the frame into the rails on the cabinet.
- Once the panel has been installed on the side of the cabinet, make sure it sits securely inside the frame channel by making slight adjustments. Slide the top and bottom ends of the frame into the top and bottom rails of the cabinet. Fig. 3.
- Slide the panel all the way in and repeat on the other side.

### NOTE


If storm window blocks AC, see Fig. 15.



The images shown here are for illustrative purposes only and may be subject to change.

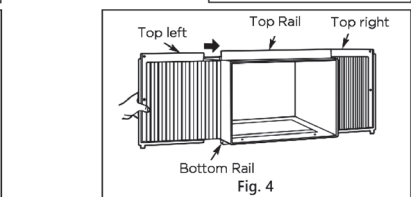


## 4. Secure the Accordion Panels



A. Keep a firm grip on the air conditioner, carefully place the unit into the window opening so the bottom of the air conditioner frame is against the window sill (Fig. 5). Carefully close the window behind the top rail of the unit.

### NOTE

Check that air conditioner is tilted back per dimension H (Fig. 5) (tilted about 3° to 4° downward to the outside). After proper installation, condensate should not drain from the overflow drain hole during normal use. Adjust the slope if otherwise.



B. Extend the side panels out against the window frame (Fig. 6).




## 5. Install Support Bracket

A. Place the frame lock between the frame extensions and the window sill as shown (Fig. 7). Drive 3/4" (19 mm) or 1/2" (12.7 mm) locking screws through the frame lock and into the sill.




### NOTE

To prevent window sill from splitting, drill 1/8" (3 mm) pilot holes before driving screws.

B. Drive 3/4" (19 mm) or 1/2" (12.7 mm) locking screws through frame holes into window sash (Fig. 8).




C. To secure lower sash in place, attach right angle sash lock with 3/4" (19 mm) or 1/2" (12.7 mm) screw as shown (Fig. 9).

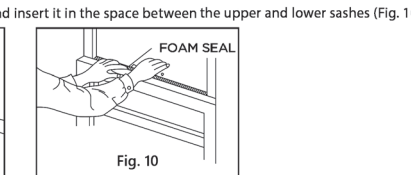





## If AC is Blocked by Storm Window

### Models RAC-WK05/06/08/10/12



Add wood as shown in Fig. 11, or remove storm window before air conditioner is installed.

If storm window frame must remain, be sure the drain holes or slots are not caulked or painted shut. Accumulated rain water or condensation must be allowed to drain out.



## Removing AC From Window

- Turn AC off, and disconnect power cord.
- Remove sash seal from between windows, and unscrew safety lock.
- Remove screws installed through frame and frame lock.
- Close (slide) side panels into frame.
- Keeping a firm grip on air conditioner, raise sash and carefully remove.
- Be careful not to spill any standing water while lifting unit from window. Store parts WITH air conditioner.


## CARE AND CLEANING

### CAUTION

Clean your air conditioner occasionally to keep it looking new. Be sure to unplug the unit before cleaning to prevent shock or fire hazards.

## Air Filter Cleaning


### RAC-WK05 only



The air filter should be checked at least once a month to see if cleaning is necessary. Trapped particles in the filter can build up and cause an accumulation of frost on the cooling coils.

- Remove the filter by sliding it out from the right-hand side. (RAC-WK05 only)
- Push the vent handle to the Vent Closed position (where applicable).
- Open the front panel.
- Grasp the filter by the center and pull up and out.
- Wash the filter using liquid dishwashing detergent and warm water. Rinse filter thoroughly.
- Gently shake excess water from the filter. Be sure the filter is thoroughly dry before replacing.
- You may also vacuum the filter clean rather than washing.

### Models RAC-WK06 / 08 / 10 / 12



### NOTE

Never use hot water over 40°C (104°F) to clean the air filter. Never attempt to operate the unit without the air filter.

## Cabinet Cleaning

- Be sure to unplug the air conditioner to prevent shock or fire hazard. The cabinet and front may be dusted with an oil-free cloth or washed with a cloth dampened in a solution of warm water and mild liquid dishwashing detergent. Rinse thoroughly and wipe dry.
- Never use harsh cleansers, wax or polish on the cabinet front.
- Be sure to wring excess water from the cloth before wiping around the controls. Excess water in or around the controls may cause damage to the air conditioner.
- Plug in air conditioner.

## Winter Storage

If you plan to store the air conditioner during the winter, remove it carefully from the window according to the installation instructions. Cover it with plastic or return it to the original carton.


## TROUBLESHOOTING TIPS

Before calling for service, review this list. It may save you time and expense. This list includes common occurrences that are not the result of defective workmanship or materials in this appliance.

Problem	Solution
Air conditioner does not start	<ul style="list-style-type: none"> <li>Wall plug disconnected. Push plug firmly into wall outlet.</li> <li>House fuse blown or circuit breaker tripped. Replace fuse with time delay type or reset circuit breaker.</li> <li>Plug current device tripped. Press the RESET button.</li> <li>Power is OFF. Turn power ON and set to desired setting.</li> <li>Unit turned off and then on quickly. Turn unit off and wait 3 minutes before restarting.</li> </ul>
Air from unit does not feel cold enough	<ul style="list-style-type: none"> <li>Room temperature below 17°C (62°F). Cooling may not occur until room temperature rises above 17°C (62°F).</li> <li>Temperature sensing element touching cold coil. Located behind air filter. Straighten tube away from coil.</li> <li>Reset to a lower temperature.</li> <li>Compressor shut-off by changing modes. Wait approximately 3 minutes and listen for compressor to restart when set in the COOL mode.</li> </ul>
Air conditioner cooling, but room is too warm - ice forming on cooling coil behind decorative front.	<ul style="list-style-type: none"> <li>Outdoor temperature below 18°C (64°F). To defrost the coil, set to FAN ONLY mode.</li> <li>Air filter may be dirty. Clean filter. Refer to Care and Cleaning section. To defrost, set to FAN ONLY mode.</li> <li>Thermostat set too cold for night-time cooling. To defrost the coil, set to FAN ONLY mode. Then, set temperature to a higher setting.</li> </ul>
Air conditioner cooling, but room is too warm - NO ice forming on cooling coil behind decorative front.	<ul style="list-style-type: none"> <li>Air filter may be dirty. Clean filter. Refer to Care and Cleaning section. To defrost, set to FAN ONLY mode.</li> <li>Temperature is set too high, set temperature to a lower setting.</li> <li>Air directional louvers positioned improperly. Position louvers for better air distribution.</li> <li>Front of unit is blocked by drapes, blinds, furniture, etc. - restricts air distribution.</li> <li>Clear obstruction in front of unit.</li> <li>Doors, windows, registers, etc. open - cold air escapes. Close doors, windows, registers.</li> <li>Unit recently turned on in hot room. Allow additional time to remove "stored heat" from walls, ceiling, floor and furniture.</li> </ul>
Air conditioner turns on and off rapidly	<ul style="list-style-type: none"> <li>Dirty air filter - air restricted. Clean air filter.</li> <li>Outside temperature extremely hot. Set FAN speed to a higher setting to bring air past cooling coils more frequently.</li> </ul>
Noise when unit is cooling	<ul style="list-style-type: none"> <li>This is normal. Air movement sound. If too loud, set to a slower FAN setting.</li> <li>Window vibration - poor installation. Refer to installation instructions or check with installer.</li> </ul>
Water dripping INSIDE when unit is cooling	<ul style="list-style-type: none"> <li>Improper installation. Tilt air conditioner slightly to the outside to allow water drainage. Refer to installation instructions - check with installer.</li> </ul>
Water dripping OUTSIDE when unit is cooling	<ul style="list-style-type: none"> <li>Unit removing large quantity of moisture from humid room. This is normal during excessively humid days.</li> </ul>
Remote sensing deactivating prematurely (some models)	<ul style="list-style-type: none"> <li>Remote control not located within range. Place remote control within 20 feet &amp; 180°, radius of the front of the unit.</li> <li>Remote control signal obstructed. Remove obstruction.</li> </ul>
Room too cold	<ul style="list-style-type: none"> <li>Temperature setting too low. Increase temperature setting.</li> </ul>

## REMOTE CONTROL OPERATING INSTRUCTIONS

### Handling the Remote Controller



#### Location of the remote controller


- Use the remote controller within a distance of 16.4 ft (5 meters) from the air conditioner, pointing it towards the receiver. Reception is confirmed by a beep.

#### CAUTIONS


- The air conditioner will not operate if curtains, doors or other materials block the signals from the remote controller to the unit.
- Prevent any liquid from spilling onto the remote controller. Do not expose the remote controller to direct sunlight or heat.
- If the infrared signal receiver on the indoor unit is exposed to direct sunlight, the air conditioner may not function properly. Use curtains to prevent the sunlight from falling on the receiver.
- If other electrical appliances react to the remote controller, either move these appliances or contact a service center.

### Installing the Battery (Not included)


**Step 1:** Insert a coin vertically in the groove on the battery cover, and turn 45° clockwise, making sure that the groove is aligned with the "unlock" sign as shown below and remove the battery cover.



**Step 3:** Replace the battery cover, making sure the battery cover groove is aligned with the "unlock" sign. Insert a coin vertically in the groove and press it gently, then rotate 45° counter clockwise, making sure the groove is aligned with the "lock" sign as shown below.



**Step 2:** Install battery inside the remote controller, the positive (+) side up.



#### WARNING

- Battery must be disposed of properly. Do not short circuit or dispose of in a fire.
- Keep batteries out of the reach of children.
- Do not ingest.
- Non-rechargeable batteries are not to be recharged.
- Exhausted batteries are to be removed from the product.


### Remote Control Specifications

Model	RG15A(B)/E
Rated Voltage	3.0V (Lithium battery CR2025)
Lowest Voltage of CPU Emitting Signal	2.4 V
Signal Receiving Range	16.4 ft (5 m)
Environment	-5°C~60°C (23°F~140°F)

### NOTE

- Button design is based on typical model and may vary slightly from the actual one you purchased.
- All the functions described are accomplished by the unit. If the is without no this feature, the unit will not respond if the corresponding button on the remote is pressed.
- When there are significant differences between features or operation implied by the remote control illustration and the actual functions described in the USER'S MANUAL, the descriptions in the USER'S MANUAL shall prevail.

**NOTE:** The remote control vary depend of model. The buttons on the remote control may have a different name or location than the remote control shows in this manual.



## Function Buttons

### ON/OFF button

Operation starts when this button is pressed and stops when the button is pressed again.

**NOTE:** If the unit has ENERGY SAVER function, it will initiate automatically the Energy Saver function under Cool, Dry, and Auto (only Auto-Cooling and Auto-Fan) modes.

### TEMP DOWN button

Push this button to decrease the indoor temperature setting.

### TIMER button

Push this button to activate the "Auto Start" or "Auto Stop" program.

### ONE TOUCH button

Push this button and the system will automatically shift to COOL operation with auto fan speed and a temperature setting of 26°C/80°F. Any timer setting program will be cancelled (on some models).

### MODE button

Press this button to select the desired operation mode.

### TEMP UP button

Push this button to increase the indoor temperature setting.

### FAN button

Used to select the desired fan speed.


### SLEEP button

Press this button to activate the Sleep mode. This function is available on COOL or AUTO mode only and will maintain the most comfortable temperature for you and while saving energy. For more details, see "sleep operation" in "USER'S MANUAL."

### ENERGY SAVER button

Press this button to activate the Energy saving mode. Press it again to stop the function (on some models).

## How to Use the Buttons




### Auto operation

- Ensure the unit is plugged in and power is available.
- Press the ON/OFF button to start the air conditioner.
- Press the TEMP UP/DOWN button to set the desired temperature.

### NOTES

- In the Auto mode, the air conditioner can logically choose the mode (Cooling or Fan) and by sensing the difference between the actual ambient room temperature and the set temperature on the remote controller.
- In Auto mode, you cannot adjust the fan speed. As it is controlled automatically.
- If the Auto mode is not comfortable for you, the desired mode can be selected manually.




### Cooling / Fan operation

- Ensure the unit is plugged in and power is available.
- Press the ON/OFF button to start the air conditioner.
- Press the MODE button to select Cool or Fan mode.
- Press the TEMP UP/DOWN button to set the desired temperature.
- Press the FAN button to select the fan speed.

### NOTE

No matter in any model, the temperature setting is not displayed on the remote controller and you are not able to control room temperature. In this case, only steps 1, 2 and 4 may be performed.




### COMBINED TIMER

Setting both ON and OFF timers simultaneously (AUTO STOP > AUTO START (On > Stop > Start operation))

This feature is useful when you want to stop the air conditioner after you go to bed, and start it again in the morning when you wake up or when you return home.

### Example:

To stop the air conditioner 2 hours after setting and start it again 10 hours after setting.




- Press the TIMER button until the TIMER OFF indicator is displayed on the LED display of the air conditioner.
- Use the UP/DOWN button to display "2.0" on the LED display of the air conditioner.
- Press the TIMER button again to display the TIMER OFF on the LED display of the unit.
- Use the UP/DOWN button to display "10" on the LED display of the unit.
- Wait for 5 seconds until the previous display appears in LED window.

### AUTO START > AUTO STOP (Off > Start > Stop operation)

This feature is useful when you want to start the air conditioner before you wake up and stop it after you leave the house.

### Example:

- To start the air conditioner 5 hours after setting, and stop it 8 hours after setting.
- Press the TIMER button until the TIMER ON indicator is displayed on the LED display of the air conditioner.
- Use the UP/DOWN button to display "5.0" on the LED display of the air conditioner.
- Press the TIMER button again to display the TIMER OFF on the LED display of the unit.
- Use the UP/DOWN button to display "8.0" on the LED display of the unit.
- Wait for 5 seconds until the previous display appears in LED window.




### Dehumidifying operation

- Ensure the unit is plugged in and power is available.
- Press the ON/OFF button to start the air conditioner.
- Press the MODE button to select Dry.
- Press the TEMP UP/DOWN button to set the desired temperature.

### NOTE

In the Dehumidifying mode, you cannot adjust the fan speed. As it is controlled automatically.



### Timer operation

Press the TIMER button to initiate the Auto-start and Auto-stop setting program of the unit.

### To set the Auto-start/stop time.

- Press the TIMER button, when the TIMER ON indicator is displayed on the LED window of the air conditioner, it indicates the Auto Start setting program is initiated. When the TIMER OFF indicator is displayed on the LED window of the air conditioner, it indicates the Auto Stop setting program is initiated.
- Press or hold the Up (+) or Down (-) to change the Auto time. The control will count down the time remaining until start/stop.
- The selected time will register in 5 seconds and the air conditioner will automatically revert back to display the previous temperature setting.
- Turning the unit ON or OFF at any time will cancel the Auto Start/stop function.

### Energy saver operation

In this mode, the fan will continue to run for 3 minutes after the compressor shuts off. The fan then cycles on for 2 minutes at 10 minute intervals until the room temperature is above the set temperature, at which time the compressor turns back on and cooling resumes.

### NOTE

- Button design is based on a typical model and may slightly vary from the actual one you purchased.
- All the functions described are accomplished by the unit. If the is without no this feature, the unit will not respond if the corresponding button on the remote is pressed.
- When there are significant differences between features or operation implied by the remote control illustration and the actual functions described in the USER'S MANUAL, the descriptions in the USER'S MANUAL shall prevail.
- The device may comply with local national regulations. In Canada, it should comply with CAN ICES-3(B)/NMB-3(B). In USA, this device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
  - Reorient or relocate the receiving antenna.
  - Increase the separation between the equipment and receiver.
  - Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
  - Consult the dealer or an experienced radio/TV technician for help.
  - Changes or modifications not approved by the party responsible for compliance could void users authority to operate the equipment.

### WARNING: Chemical Burn Hazard. Keep batteries away from children.

This product contains a lithium button/coin cell battery. If a new or used lithium button/coin cell battery is swallowed or enters the body, it can cause severe internal burns and can lead to death in as little as 2 hours. Always completely secure the battery compartment. If the battery compartment does not close securely, stop using the product, remove the batteries, and keep it away from children. If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

PRINTED IN MEXICO  
 Elbrd: J.M SC: 05-14-2024  
 OBPN: N/A SHDML: RACWK0511CMU 8 0 4 1 0 9 4 7 3  
 ADD: RACWK0611CRU\_RACWK0811ESCWU  
 RACWK1011ESCWU\_RACWK1211ESCWU