

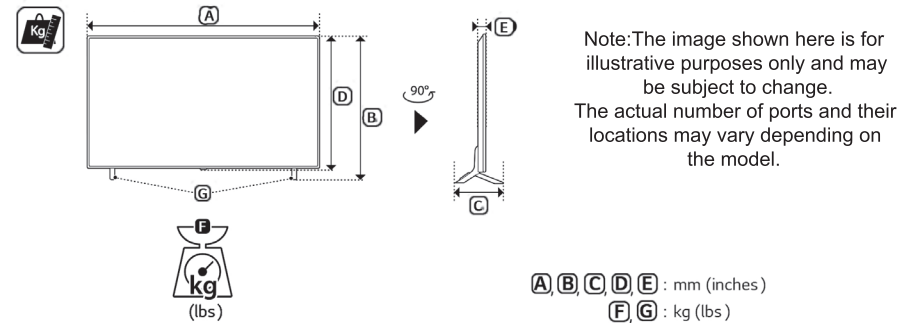


The remote control may vary depending on the model: The buttons on remote control may have a different name or location than the remote control shown in this manual.

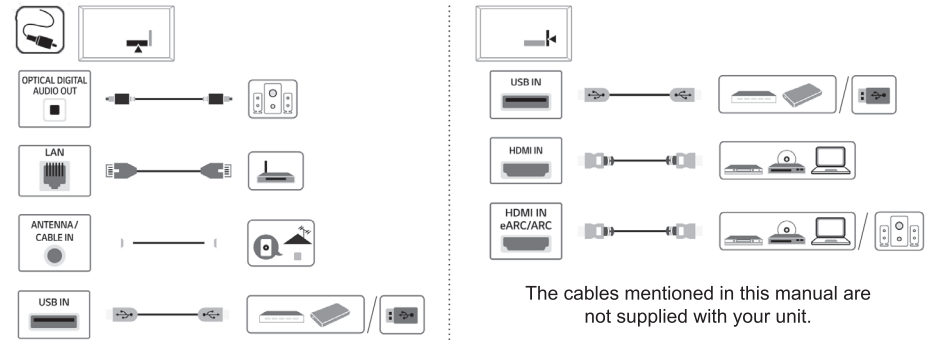

MODELS	A		B		C		D		E		F		F-G		Power consumption
75NANO80AQA	1,675	1,675	1,029	1,029	359	359	964	964	44.5	44.5	36.9	36.9	35.9	35.9	240 W
	(65.9)	(65.9)	(40.5)	(40.5)	(14.1)	(14.1)	(37.9)	(37.9)	(1.7)	(1.7)	(81.3)	(81.3)	(79.1)	(79.1)	
Power requirement										AC 120 V- 50/60 Hz					

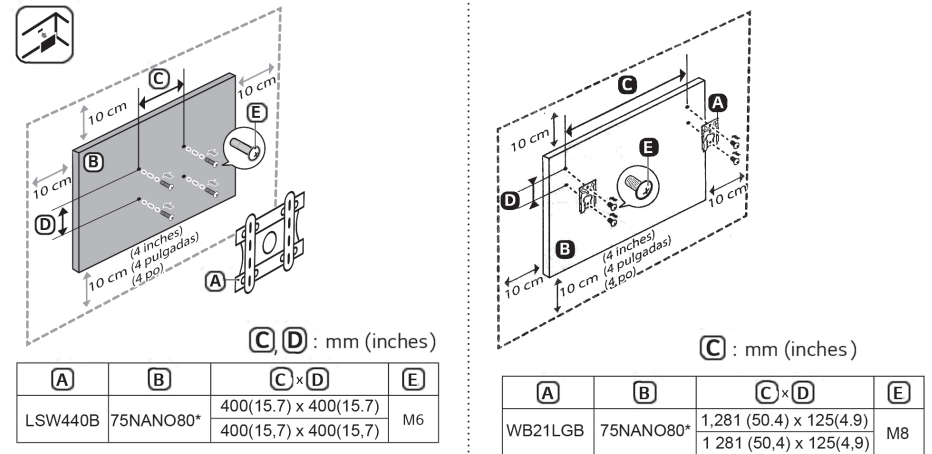

A	B	C x D	E
LSW440B	75NANO80*	400(15.7) x 400(15.7) 400(15.7) x 400(15.7)	M6

A	B	C x D	E
WB21LGB	75NANO80*	1,281 (50.4) x 125(4.9) 1,281 (50.4) x 125(4.9)	M8

